

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.

1. REPORT DATE (DD-MM-YYYY)		2. REPORT TYPE Technical Papers		3. DATES COVERED (From - To)	
4. TITLE AND SUBTITLE				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER 1011	
				5e. TASK NUMBER 0011	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Air Force Research Laboratory (AFMC) AFRL/PRS 5 Pollux Drive Edwards AFB CA 93524-7048				8. PERFORMING ORGANIZATION REPORT	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) Air Force Research Laboratory (AFMC) AFRL/PRS 5 Pollux Drive Edwards AFB CA 93524-7048				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S NUMBER(S)	
12. DISTRIBUTION / AVAILABILITY STATEMENT Approved for public release; distribution unlimited.					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT A	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON Leilani Richardson
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NUMBER (include area code) (661) 275-5015

Standard Form 298 (Rev. 8-98)
Prescribed by ANSI Std. Z39.18

7 Separate items enclosed

1119 161

11/2/02

MEMORANDUM FOR PRS (In-House/Contractor Publication)

FROM: PROI (STINFO)

20 June 2002

SUBJECT: Authorization for Release of Technical Information, Control Number: **AFRL-PR-ED-TP-2002-162**
David Kirtley (ERC) and Mike Fife (PRSS), "A Colloid Engine Accelerator Concept"

AIAA JPC

(Statement A)

(Indianapolis, IN, 8-10 July 2002) (Deadline = 30 June 2002)

1. This request has been reviewed by the Foreign Disclosure Office for: a.) appropriateness of distribution statement, b.) military/national critical technology, c.) export controls or distribution restrictions, d.) appropriateness for release to a foreign nation, and e.) technical sensitivity and/or economic sensitivity.

Comments: _____

Signature _____ Date _____

2. This request has been reviewed by the Public Affairs Office for: a.) appropriateness for public release and/or b) possible higher headquarters review.

Comments: _____

Signature _____ Date _____

3. This request has been reviewed by the STINFO for: a.) changes if approved as amended, b) appropriateness of references, if applicable; and c.) format and completion of meeting clearance form if required

Comments: _____

Signature _____ Date _____

4. This request has been reviewed by PR for: a.) technical accuracy, b.) appropriateness for audience, c.) appropriateness of distribution statement, d.) technical sensitivity and economic sensitivity, e.) military/national critical technology, and f.) data rights and patentability

Comments: _____

APPROVED/APPROVED AS AMENDED/DISAPPROVED

PHILIP A. KESSEL

Date

Technical Advisor

Space and Missile Propulsion Division

20021119 161

A Colloid Engine Accelerator Concept

D. Kirtley
ERC, Inc.
Edwards AFB, CA

J. M. Fife
U.S. Air Force Research Laboratory
Edwards AFB, CA

DISTRIBUTION STATEMENT A:
Approved for Public Release -
Distribution Unlimited

A concept for a colloid engine with an electrodynamic linear accelerator is described. The charged particle source is a standard colloid engine with an extractor voltage that has an AC component. Downstream of the extractor, a series of accelerator gates are biased alternately with an AC voltage such that the charged droplets tend to remain in regions with positive electric fields. Since the droplet speed varies with their position in the accelerator, and the alternating voltage is of a constant frequency, the gate spacing must change with length. This variation in gate spacing may be determined analytically. This paper attempts to predict some of the potential performance advantages and disadvantages of such an engine. Also, design issues are explored, with special attention to potential problem areas.

Introduction

Small onboard electric propulsion (EP) thrusters have advantages over chemical engines in applications on small satellites, microsatellites, and nanosatellites. Several types of miniature EP thrusters are currently under development, including field emission thrusters, micro pulsed plasma thrusters, laser ablation thrusters, vacuum-arc thrusters, micro-ion thrusters, and micro-colloid engines. One problem with many of these devices is the requirement of high voltage or otherwise high power supply mass.

Electrostatic devices require a voltage in accordance with their propellant charge-to-mass ratio (q/m), and their specific impulse (I_{sp}). However, electrodynamic devices may not be limited by this constraint. This paper explores a concept for an electrodynamic particle accelerator with application to colloid engines.

Concept

Colloid engines are electric space propulsion devices in which droplets of a conducting fluid, typically doped glycerol or formamide, are electrostatically accelerated through a potential difference. Typically, the charged droplets are extracted from a hollow needle, which is biased with respect to an extractor gate by around 2 kV. When biased beyond its onset voltage the conductive fluid on the needle tip forms a Taylor cone-jet¹; downstream, the jet breaks up and the particles are extracted. After extraction, the charged droplets may exit the device, or go through a second electrostatic acceleration stage, once again on the order of kV.

The concept presented here differs from a traditional colloid engine by using multiple accelerator gates biased alternately

at a much lower AC voltage to linearly accelerate colloid droplets after extraction from the needle. Fig. 1 and Fig. 2 show these configurations.

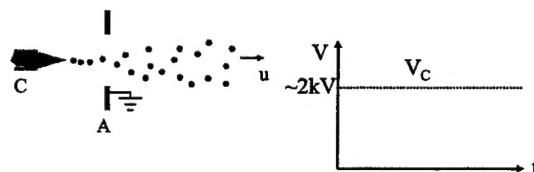


Fig. 1. Schematic of a typical colloid engine and extraction voltage.

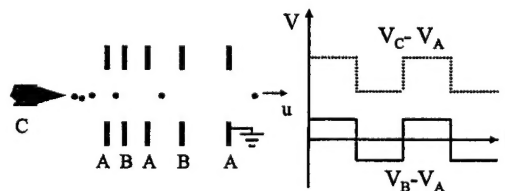


Fig. 2. Schematic of a colloid engine with electrodynamic linear accelerator and accelerator and extraction voltages.

The fluid particle droplets are accelerated in alternating sets of gates with an AC voltage. Provided the gate spacing is 'tuned' to the frequency of the extracted droplets and to the AC voltage, this configuration allows an unlimited number of acceleration gates in a thruster.

Governing Equations and Theory

Critical parameters for the design of the acceleration system are the gate voltage, spacing, and frequency. Following are the governing principles for the colloid linear accelerator. Most are based on simple electrostatics as every particle is in between two charged grids, and the voltage on those grids is constant for the time the particle is between them. Based on colloid technology^{2,3} and fundamental electrostatics the specific impulse is:

$$I_{sp} = \sqrt{2 \frac{q}{m} \frac{NV_A}{g^2}} \quad (1)$$

Where q/m is the charge to mass ratio, N is the number of gates, and V_A is the acceleration voltage per gate (assuming a square wave and that all gates have the same voltage). Correspondingly, the thrust is:

$$F = \dot{m} I_{sp} g = \dot{m} g \sqrt{2 \frac{q}{m} \frac{NV_A}{g^2}} \quad (2)$$

Fig. 3 shows the thruster performance increase by using many (N) rather than 1 acceleration gate. For this analysis, the extraction parameters q/m and \dot{m} can be described by empirical solutions^{4,5,6} such that a preliminary estimate of performance may be determined using the equations above. Couple this preliminary extractor information with the previous accelerator performance analysis and a good understanding of the system emerges; results are given in Figs 4-5.

Assuming the droplet has initial velocity of zero, the geometry and spacing of the first gate, X_{G1} , may be determined simply. X_{G1} depends on the frequency, f , and vice versa:

$$X_{G1} = \sqrt{\frac{1}{2} \frac{q}{m} V_A \left(\frac{1}{f} \right)^2} \quad (3)$$

This gives the gate spacing between the extractor and the first gate. However, gate spacing is not linear along the length of the accelerator, and once the first gate spacing is determined, the rest must be spaced according to the following:

$$X_N = C_{GN} X_{G1} \quad (4)$$

C_{GN} has been numerically computed, and is given versus gate number in Fig. 6.

Using these relationships, it can be shown that voltage can be totally dependent on frequency (for a constant q/m) and independent of gate spacing, i.e. the voltage and I_{sp} can be throttled mid-mission without a geometry change within the acceleration system.

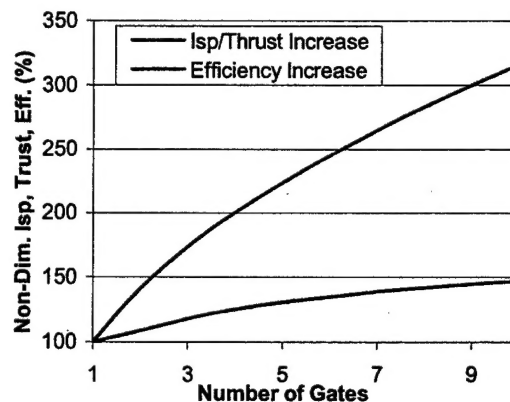


Fig. 3. Performance increase due to multiple gates versus single accelerator gate. Assumes constant extraction parameters and gate voltages.

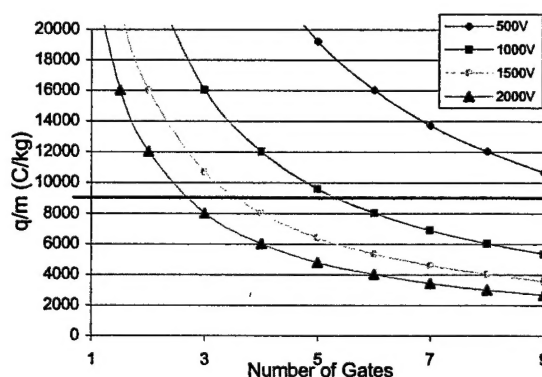


Fig. 4. Charge-to-mass ratio required for $I_{sp}=1000s$ and $X_{G1}=1mm$. 9000 C/kg is an expected operational target

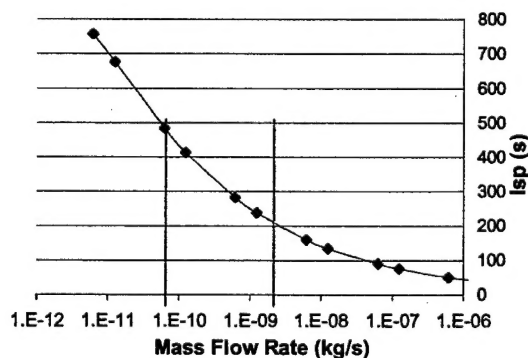


Fig. 5. Relationship between I_{sp} and mass flow rate for a 5-gate accelerator and extraction at 1500V. Noted is the flow rate region of interest.

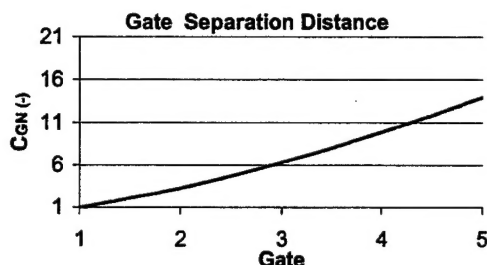


Fig. 6. Gate separation distance coefficient, CGN, versus gate number.

This paper discusses a square wave as the accelerator voltage signal, but it may be possible (with a ~5% accelerator efficiency loss) to use a sine wave, thereby eliminating the need for high power rectifier circuits all together.

Comparison with Traditional Colloid Engines

This concept retains the performance benefits of a colloid thruster, namely potentially high I_{sp} , high acceleration efficiency (70%+), simple acceleration physics, throttleability, and scalability (ability to miniaturize). In addition, the AC linear accelerator allows a reduction in operating voltage and increased variable operating parameters. This may simplify the power processing electronics significantly by a) not requiring a DC rectifier or other complicated switching mechanism, and b) eliminating the presence of high voltages. Potentially, a small oscillator is all that would be required, which could be miniaturized much more easily.

In terms of expected performance, this concept is similar to colloid engines being developed currently⁷ and can operate with 70%+ efficiency at I_{sp} 's between 500-1500s with 10's of μN per needle. The needles can be arranged in array for to develop thruster capable of mN thrusts. Some penalty must be paid for the additional mass of the accelerator stages, however.

The colloid linear accelerator engine still has the same disadvantages as typical colloid thruster: complicated flow system, potential gate clogging, and beam neutralization requirement. However, depending on the mission, the efficiency and mass savings over other micro-thrusters may balance out.

Design Complications

Using multiple gates in a colloid engine by itself adds very little design complication, however the pulsed nature of the device does. In order to separate the droplets into groups or individual droplets the extractor must be pulsed, and there is, so far, little empirical data for this process.⁸ Also the start and stop transients must all be addressed as to their effect on lifetime (clogging) and efficiency.

Furthermore, the design may be sensitive to droplet q/m . If the droplets do not have a uniform and predictable q/m , the multi-gate accelerator concept will not work properly.

Another design complication may be the high frequencies required. Fundamentally, the system requires frequencies near the exit velocity divided by the gate spacing. For 1mm spacing, and I_{sp} around 1000s, 10+ MHz frequencies are required. Even voltages of around 50V are relatively high for this frequency. One possible approach would be to use piezo-electric oscillators. Nevertheless, this is considered to be a very difficult problem inherent to this concept.

Conclusions

This paper has attempted to introduce a design for a multi-gate AC colloid thruster that has the potential to decrease complexity and operation voltage of a colloid thruster while retaining their excellent performance characteristics. There are many engineering challenges ahead for this design. However, the concept of the multiple-gate AC linear accelerator is general, and may also be considered for use on other electric propulsion devices. For example, ion engines may be able to benefit more from this technology. In the ion engine case, q/m is more consistent and predictable, therefore eliminating some of the problems mentioned above.

The fundamental advantage of this technology is that it utilizes AC operation and multiple gates to lower the operating voltage, while retaining the performance and throttleability of an electrostatic thruster.

References

- ¹Gamero-Castano and Hruby. "Electrospray as a Source of Nanoparticles of Efficient Colloid Thrusters." *Journal of Propulsion and Power*, 2001.
- ²Mahoney, John. "Performance of Colloid Annular Emitters." AIAA-73-1076, 1973.
- ³Cloupeau and Prunet-Foch. "Electrohydrodynamic-spraying functioning modes: a critical review". *Journal of Aerosol Sciences*, 1994.
- ⁴Ganan-Calvo, A.M. et al. "Current and Droplet size in the Electro spraying of liquids. Scaling laws." *Journal of Aerosol Sciences*. 1996
- ⁵Chen and Pui. "Experimental Investigation of Scaling Laws for Electro spraying: Dielectric Constant Effect." *Aerosol Science and Technology*, 1997.
- ⁶De la mora and Loscertales. "The current emitted by highly conducting Taylor cones." *Journal of Fluid Mechanics*, 1994.
- ⁷Shtyrilin, A.F. "State of the Art and Future Prospects of Colloidal Electric Thrusters." IEPC-95-103, 1995.

⁸Shelton, Lear, Kidd, et. al. "Charged Droplet Electrostatic Thruster Systems". AFAPL-TR-70-31, 1970. Available: DTEC AD0871427

¹⁰Griffiths, David J. Introduction to Electrodynamics. Prentice Hall, 1999.

¹¹Shelton, Lear, Kidd, et. al. "Charged Droplet Electrostatic Thruster Systems". AFAPL-TR-70-31, 1970. Available: DTEC AD0871427